

Thermal imaging cameras with temperature measurement capabilities for airborne applications

Corona 350

Gyro-Stabilized Power Line Inspection System



Equipped with different camera types the Corona 350 can easily detect both corona and hot-spots.

The Corona 350 is a gyro-stabilized gymbal containing four different cameras: an Ultraviolet camera for corona detection, a thermal imaging camera for detecting hot-spots in powerlines which can lead to costly breakdowns, a visual light camera and a digital frame camera. The Corona 350 is the ideal instrument for aerial power line inspections.

The Corona 350 IR inspection system offers utility companies a complete solution for the inspection and maintenance of transmission lines, distribution and substations. The thermal imaging camera and UV technologies are complementary and are an ideal combination for setting up a well established predictive maintenance program.

Lightweight high stiffness composite body

The gymbal is build from high stiffness composite materials and aluminum inner structure insuring the lowest weight possible.

4 axis active stabilization

The design is four axis active gyro-stabilized based upon very low drift fiber-optic gyroscopes and a digital servo motor control system and a patented two axis linear isolator. This unique design offers outstanding stability, ensuring easy steering and accurate imaging independent of aircraft movements.

GPS

GPS data is stored as part of each captured image file thus permitting geo-referencing of fault locations.

Ultraviolet camera detects Corona in broad daylight

The corona detection camera is capable of detecting and producing video images of the energy generated by the corona phenomena. The camera is fully solar-blind and can visualize

corona in full daytime without being affected by sun radiation. Corona and arcing occur by stress of the electric field which is not current dependent and therefore can only be revealed by UV inspection.

Radiometric Infrared camera

A radiometric thermal imaging camera allows reading temperature values from the image. It can easily identify problems where the fault is apparent as a change in temperature. Potential defects will be mainly exhibited as hot spots and thermal gradients which will not be revealed by UV inspections.

Advanced Infrared software

Infrared radiometric images are captured in the ruggedized on-board during flight. FLIR Reporter software permits analysis of the temperature data within the IR images FLIR Reporter features a Microsoft WORD Report Wizard that guides you step-by-step through the process of adding images and text, making report creation quick and easy.

Video Auto Tracker


The airborne environment is a busy workplace for the operator. The auto tracker comes standard in the Corona 350 and allows the operator to automatically lock the field-of-view onto structures for hands-free operation allowing the operator to perform other tasks like note taking, image capture, etc.

EASA certified installations

FLIR Systems PolyTech AB is a certified Part 21 and Part 145 organization being able to issue release certificates of airworthiness (EASA Form 1) for its products for the most popular helicopter models currently operating worldwide.

HD COLOR TV CAMERA

THE HD camera features full 1920 x 1080 HD resolution. The HD camera module incorporates a HD "Exmor™ CMOS sensor" providing high image quality and high sensitivity. Combined with the 20x optical zoom lens the camera provides a powerful HD solution which is ideally suited for use in the airborne environment to capture highly detailed imagery.

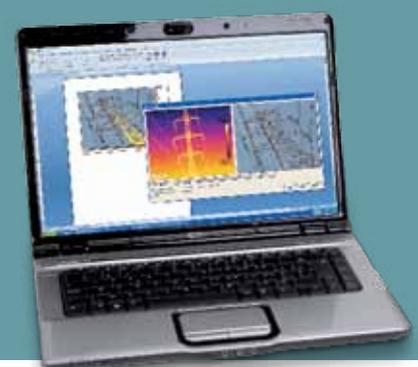

Corona 350



Technical specifications

GIMBAL SPECIFICATIONS

Active Gyro-stabilization	4 axis stabilization
Field of Regard	Elevation: +20° to -120° Azimuth: +360° continuous
Maximum Slew Rate	60°/sec.
Maximum Slew Acceleration	>300°/sec/sec
Diameter	13.8 in. (350 mm)
Height	18.8 in. (478 mm)
Weight (w/cameras and lens)	59.5 lbs. (27 kg)
Input Voltage	22 to 30 VDC 10 amps
Power Consumption	< 150 watts

ENVIRONMENTAL SPECIFICATIONS

Standards	RTCA DO-160E
Operating Temperature	-40°C to +40°C

UV CORONA DETECTION CAMERA & LENS

UV Sensitivity	3 x 10-18 watt/cm2
Field of view	16°/8°/4°
Optical channels	UV and visible channels overlaid
Focus	Manual or automatic
Visible channel	Synchronized with UV channel
Zoom Ratio	2X/1X/0.5X optical

INFRARED CAMERA & LENS

Detector Technology	Focal Plane Array, uncooled microbolometer
Detector Size	640 x 480 pixels
Spectral Wavelength	7.5-13µm
Sensitivity	30mK @ 30°C
Temperature Ranges	-40°F to 2732°F (-40°C to +1500°C) in 3 ranges
Accuracy	±1°C or ±1%
Frame Rate	25Hz (PAL) or 30Hz (NTSC)
Field of view	12° (H) x 9° (V) 6° (H) x 3° (V); ezoom
Focus	Manual or automatic

COLOR TV CAMERA & LENS

Detector Technology	EXMOR CMOS
Number of Pixels	Approximately 3.27 Mega pixels
Signal-to-Noise Ratio	>50 dB
Zoom	20 x optical, 2x electronic
Field of view	55.4° to 2.9° (1080p) 37.6° to 1.95° (720p)
Focus	Manual or automatic

DIGITAL STILL FRAME CAMERA

Image Capture Device	1/1.7" CCD
Number of Pixels	Approx. 14.7 Megapixels
Maximum aperture	f/2.8 (W) - f/4.5 (T)
Focal length	40-140mm (35mm film equivalent)



FLIR Systems
PolyTech AB
Smedjegatan 41
SE-632 20 Eskilstuna
Sweden
Phone: +46.16.176660
Fax: +46.16.128660
e-mail: sales.polytech@flir.se

www.polytech.se

FLIR Commercial Vision Systems B.V.
Charles Petitweg 21
4847 NW Teteringen - Breda
The Netherlands
Phone : +31 (0) 765 79 41 94
Fax : +31 (0) 765 79 41 99
e-mail : flir@flir.com

FLIR Systems, Inc
CVS World Headquarters
70 Castilian Drive
Santa Barbara, CA 93117
USA
Phone : +1 805 964 9797
Fax : +1 805 685 2711
e-mail : sales@flir.com

www.flir.com



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
©Copyright 2009, FLIR Systems, Inc. All other brand and product names are trademarks of their respective owners.

Your local dealer:

Thermal imaging cameras with temperature measurement capabilities for airborne applications